

YAGI TV Antenna - UHF

YAGI TV antena - UHF

P-41-7 TRIPLEX MF

P-41-7 TRIPLEX CF

The antenna is designed for the digital terrestrial signals DVB-T / HDTV reception.

Antena je posebej razvita za sprejem digitalnih zemeljskih signalov DVB-T / HDTV.

Covers frequency range 470 - 694 MHz (Ch. 21 - 48).

Pokriva frekvenčni pas 470 - 694 MHz (kanali 21 - 48).

Antenna is **mechanically** tuned to Ch. 21 - 48.

Ch. 49 - 69 (700-900 MHz) are attenuated.

Antena je mehansko optimizirana za kanale 21 - 48.

Kanali 49 - 69 (700-900 MHz) so zadušeni.

Impedance 75 Ohm.

Impedanca 75 Ohm.

Antenna carrier is 18x18 mm.

Nosilec antene je 18x18 mm.

Can be used for both polarisations:
horizontal or vertical.

Primerna za horizontalno ali vertikalno polarizacijo.

Reliable and robust design for optimum
performance and long life time.

Zanesljiv in robusten dizajn za optimalno
delovanje in dolgo življenjsko dobo.

Antenna can be easily upgraded using more
selective 4G (LTE) / 5G filter *.


Antena se lahko enostavno nadgradi z bolj
selektivnim 4G (LTE) / 5G filtrom *.



Antenna with grid reflector

Antena z mrežnim reflektorjem

P-41-7 TRIPLEX MF



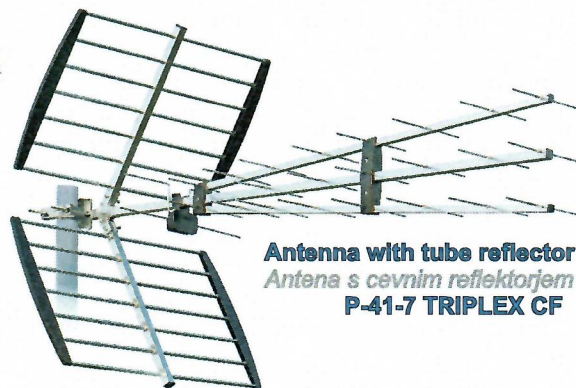


Antenna with tube reflector

Antena s cevnim reflektorjem

P-41-7 TRIPLEX CF

Type Tip	No. of elements Število elementov	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Beam width Širina glav. lista	Antenna length Dolžina antene	Connection Priključek	Packing Pakiranje pcs. cm / m3 kos cm / m3
P-41-7 TRIPLEX MF	41	11,5 - 16 dB(i)	28 dB	Hor. 32° Vert. 35°	118 cm	"F"	5 120x36x21 / 0,091
P-41-7 TRIPLEX CF			27 dB				

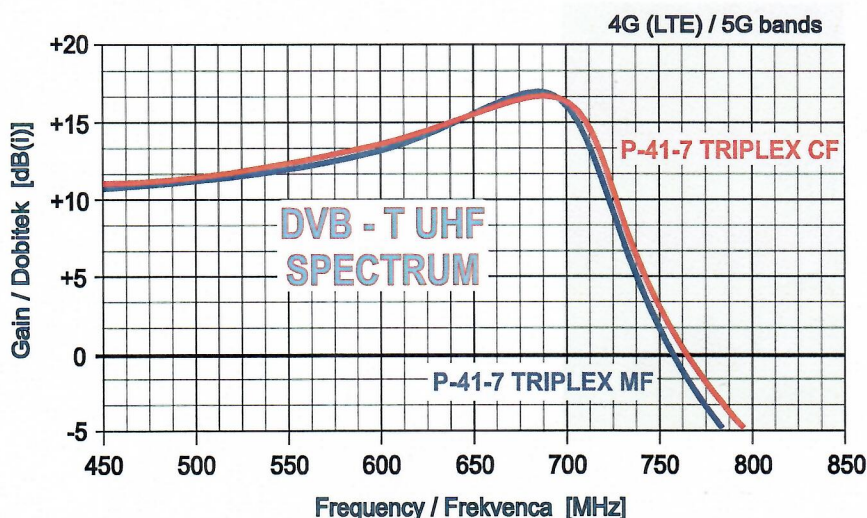

* Optionally embeddable
passive or active electronic
filter for unwanted 4G / 5G
signals above 694 MHz.

* Opcijsko vgradljiv pasivni
ali aktivni elektronski filter
za neželene 4G / 5G
signale nad 694 MHz.